



B42 Series Regulator

Residential Regulator

- ▶ **Increased Safety**
- ▶ **Long Service Life**
- ▶ **Easier Installation**
- ▶ **Easier Transport**

Features

- Interchangeable aluminum orifice
- 12.6 sq. in² of diaphragm area
- Molded deep convolution diaphragm with o-ring seal
- Plated steel diaphragm plate
- Stainless steel lever pin
- Plated steel 6:1 lever
- One piece molded Buna-N valve seat
- Die cast zinc valve stem
- Delrin[®] vent valve with Buna-N seat
- Spring loaded internal relief valve assembly
- 1" and 3/4" threaded vent with stainless steel screen
- Fiberglass reinforced polyethylene seal cap with integral relief valve stop
- Field interchangeable adjustment spring
- CSA 6-18 Approved
- Measurement Canada Approved-G108
- ANSI B109.4 Compliant



Applications

Consistent pressure reduction of gas for typical domestic and light commercial applications.

Description

The B42 is a spring loaded self-operated regulator with internal relief option. The B42 features a molded diaphragm, 6:1 lever ratio and a one inch vent. The benefit is a lighter more compact unit that provides the power, capacity and relief performance of larger regulators.

▶ Option Designations

N	No Internal Relief
R	Internal Relief
HP	Available - See spring chart

▶ B42N

The B42N is a spring loaded self-operated regulator with no internal relief (N) valve. This model can be used on low or intermediate inlet pressures where an internal relief, or other type of over-pressure protection device is not required.

▶ B42R

The B42R is the internal relief (R) version of the B42 Series. The large 1" internal relief valve provides exceptional relief capacity.

▶ Compact Size

While the model B42 is more compact than traditional regulators, it was also designed to meet customer expectations for safety and long field life. The B42 is designed to consolidate product usage for both residential and light commercial applications.

Designed to Increase Your Customer's Satisfaction and Reduce Your Total Costs.

The model B42 is uniquely constructed to give utilities the edge they need in an increasingly complex and competitive marketplace. The model B42 excels with benefits of size, safety, performance, and cost. The B42 also offers three connection versions providing the greatest flexibility for your regulation needs. In addition, due to inventory and manufacturing enhancements this product can be delivered with unparalleled speed and scheduling dependability.



- ▶ **Model B42 Series regulators exceed all AGA/ANSI B109.4 & CSA 6-18 specifications**

Correction factors for non-natural gas applications:

The B42 may be used to control gases other than natural gas. To determine the capacity of the B42 for gases other than natural gas, it will be necessary to multiply the values within the capacity tables by a correction factor.

The table below lists the correction factors for some of the more common gases:

Gas Type	Specific Gravity	Correction Factor (CF)
Air	1.0	0.77
Butane	2.01	0.55
Carbon Dioxide (Dry)	1.52	0.63
Carbon Monoxide (Dry)	0.97	0.79
Natural Gas	0.60	1.00
Nitrogen	0.97	0.79
Propane	1.53	0.63
Propane-Air-Mix	1.20	0.71

To calculate the correction factor for gases not listed on the table above, it will be necessary to know the specific gravity of the gas and use it in the formula listed below:

$$\text{Correction Factor (CF)} = \sqrt{\frac{SG_1}{SG_2}}$$

Where:


SG_1 = Specific Gravity of the gas in which the capacity is published.

SG_2 = Specific Gravity of the gas to be controlled.

Construction

Actaris takes pride in delivering American made products with the utmost concern for safety, quality and customer satisfaction.

- 1 - All metal restricting orifice
- 2 - Full 1" relief vent (3/4" optimal)
- 3 - Field interchangeable springs
- 4 - Dual positive relief stops
- 5 - All metal linkage
- 6 - Integral o-ring diaphragm seal
- 7 - Mechanically fastened ID tag
- 8 - 1-piece valve seat design

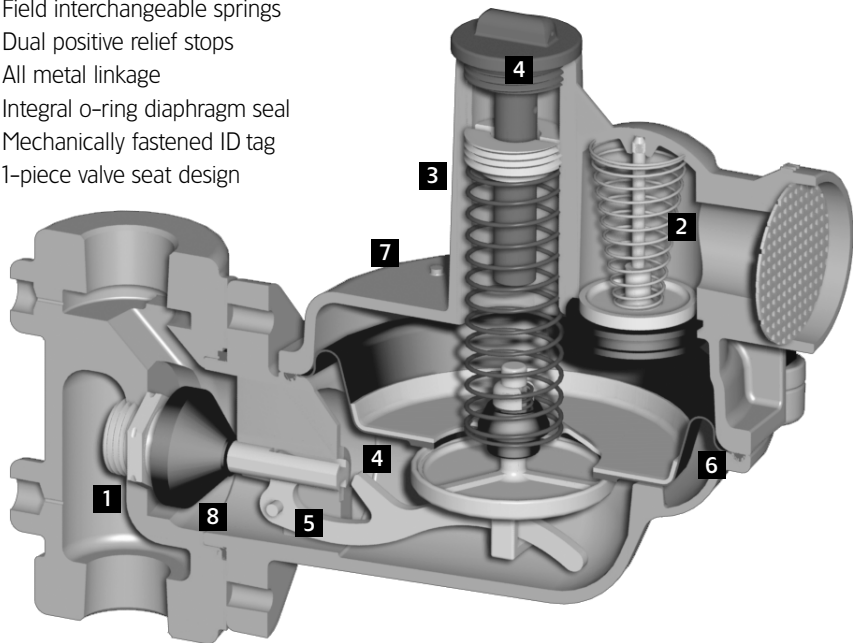

Material Construction:

Valve Body:	High tensile strength cast iron (ASTM A-126, Class A)
Orifice:	Aluminum
Valve Seat:	Buna-N or silicone
Valve Stem:	Die cast zinc
Lever Pin:	Stainless steel (Type 303)
Lever:	Zinc and dichromate plated steel (AISI C1010)
Upper Diaphragm Plate:	Zinc and dichromate plated steel (14 gauge steel)
Lower Diaphragm Plate:	Polyester
Diaphragm:	Buna-N on Dacron reinforcing fabric
Vent Valve/Seat:	Neoprene
Vent Screen:	Stainless Steel (16 mesh)
Adjustment Ferrule:	Delrin
Seal Cap:	Fiberglass reinforced polyethylene
Diaphragm Case:	Die cast aluminum (ASTM B85 -Alloy SC84A)
Fastener Plating:	Dacromet with Plus Black

Shipping Weight:

12 per box:	48 lbs.
-------------	---------

Specifications

Spring Color		Outlet Pressure Range**
Standard Spring Data - B42		
Green	(p/n 762649)	5 - 7" w.c.
Brown	(p/n 762645)	6 - 8" w.c.
Blue	(p/n 762646)	8 - 14" w.c.
Silver	(p/n 762647)	12 - 28" w.c.
Yellow/Black	(p/n 762650)	1 - 2 PSIG
Alternate Spring Data - B42		
Orange	(p/n 762002)	5.5 - 9" w.c.
Dark Green	(p/n 762003)	4 - 9" w.c.
High Pressure Spring Data - B42		
Yellow	(p/n 762131)	2 - 4 PSIG
White	(p/n 762137)	4 - 5 PSIG
Relief Spring Data - B42		
Purple	(p/n 762653)	7" w.c. Above Set Point
Orange	(p/n 762655)	5" w.c. Above Set Point
Red	(p/n 762654)	6" w.c. Above Set Point
Black	(p/n 762656)	9" w.c. Above Set Point

**Note: Ranges are approximations, please contact manufacture to obtain the best spring for application.

Orifice Data	Size	K-Factor	MAOP	Emergency Inlet	Emergency Outlet	
					No Damage	Containment
	1/8"	30	125 PSIG	300 PSIG	60 PSIG	30 PSIG
	1/8" x 3/16"	30	125 PSIG	300 PSIG	60 PSIG	30 PSIG
	3/16"	71	125 PSIG	200 PSIG	60 PSIG	30 PSIG
	1/4"	127	60 PSIG	150 PSIG	60 PSIG	30 PSIG
	5/16"	193	35 PSIG	100 PSIG	60 PSIG	30 PSIG
	3/8"	290	20 PSIG	75 PSIG	60 PSIG	30 PSIG
	1/2"	416	10 PSIG	40 PSIG	60 PSIG	30 PSIG
	1/2" x 9/16"	416	10 PSIG	40 PSIG	60 PSIG	30 PSIG


Wide-Open Flow Calculations

For wide-open orifice flow calculations use the following equations:


For $P_1/P_2 < 1.89$ use: $Q = K \sqrt{P_2 (P_1 - P_2)}$ For $P_1/P_2 > 1.89$ use: $Q = \frac{KP_1}{2}$

Where: P1 = absolute inlet pressure (psia) P2 = absolute outlet pressure (psia)
 Q = flow rate (scfh) K = orifice coefficient (scfh/psia)


► Straight Body Connection

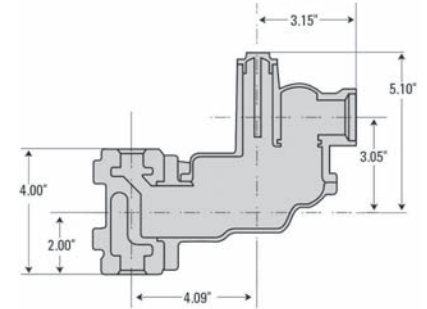

► 90 Angle Body Connection

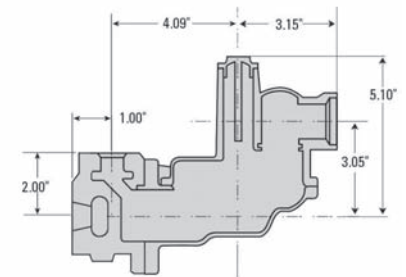

► Compact Body Connection

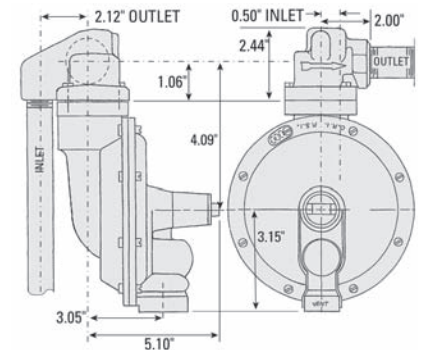

► Valve Body Sizes

Inlet	Outlet	Compact	90 Angle	Straight
1/2"	1/2"	-	X	X
1/2"	3/4"	-	X	X
1/2"	1"	-	X	-
3/4"	3/4"	X	X	X
3/4"	1"	X	X	X
3/4"	1-1/4"	-	-	X
1"	1"	-	X	X
1"	1-1/4"	-	-	X
1-1/4"	1-1/4"	-	-	X

X - indicates that the valve body is available in that configuration.

B42 Residential Regulator - Models N, R

Green Spring (762649)
Position 5
1" NPT Outlet

7" w.c. (17 mbar) - Capacity Table (1" Droop)

Capacities in scfh (m³/hr) - Orifice Size


Inlet Pressure PSIG Bar	1/8" (3.2 mm)	1/8 x 3/16" (3.2 x 4.8 mm)	3/16" (4.8 mm)	1/4" (6.4 mm)	5/16" (7.9 mm)	3/8" (9.5 mm)	1/2" (12.7 mm)	1/2 x 9/16" (12.7 x 14.3 mm)
0.5 (38 mbar)	65 (1.8)	70 (2.0)	90 (2.5)	140 (3.9)	175 (4.9)	210 (5.9)	270 (7.6)	280 (7.9)
1 (69 mbar)	80 (2.3)	110 (3.1)	140 (3.9)	200 (5.7)	275 (7.8)	300 (8.5)	400 (11.3)	450 (12.7)
2 (0.138)	100 (2.8)	180 (5.1)	225 (6.4)	250 (7.1)	375 (10.6)	425 (12.0)	600 (17.0)	700 (19.8)
3 (0.207)	170 (4.8)	225 (6.4)	310 (8.8)	350 (9.9)	500 (14.2)	575 (16.3)	800 (22.7)	910 (25.8)
5 (0.345)	215 (6.1)	280 (7.9)	400 (11.3)	500 (14.2)	725 (20.5)	825 (23.4)	1100 (31.1)	1230 (34.8)
10 (0.69)	340 (9.6)	390 (11.0)	625 (17.7)	850 (24.1)	1100 (31.1)	1300 (36.8)	Orifice Inlet Pressure Rating Exceeded	
15 (1.03)	425 (12.0)	470 (13.3)	850 (24.1)	1200 (34.0)	1550 (43.9)	1650 (46.7)		
20 (1.38)	550 (15.6)	550 (15.6)	1100 (31.1)	1450 (41.1)	1850 (52.4)			
30 (2.07)	700 (19.8)	700 (19.8)	1400 (39.6)	2000 (56.6)				
40 (2.76)	850 (24.1)	870 (24.6)	1750 (49.6)	2200 (62.3)				
50 (3.45)	1000 (28.3)	1020 (28.9)	2150 (60.9)	2500 (70.8)				
60 (4.13)	1150 (32.6)	1190 (33.7)	2300 (65.1)	2500 (70.8)				
80 (5.51)	1500 (42.5)	1590 (45.0)	2400 (68.0)					
100 (6.89)	1800 (51.0)	1870 (53.0)	2500 (70.8)					
125 (8.61)	2200 (62.3)	2280 (63.0)	2500 (70.8)					

Inlet Effect B	0.13" w.c.	0.13" w.c.	0.20" w.c.	0.36" w.c.	0.67" w.c.	0.77" w.c.	2.20" w.c.	2.20" w.c.
Lock Up C	0.5" w.c.	0.5" w.c.	0.6" w.c.	0.7" w.c.	0.8" w.c.	0.9" w.c.	1.2" w.c.	1.2" w.c.

Typical Performance Curves

Manufacturer:	Actaris
Type and Model:	B42R
Regulator:	Inlet Size 3/4" NPT
	Outlet Size 1" NPT
	Orifice Size 3/16"
	Spring Green (p/n 762649)


Set Point 7.0" w.c. with 10 PSIG inlet @ 50 scfh.
All test results are reported at a base of 14.7 PSIA and 60 F.

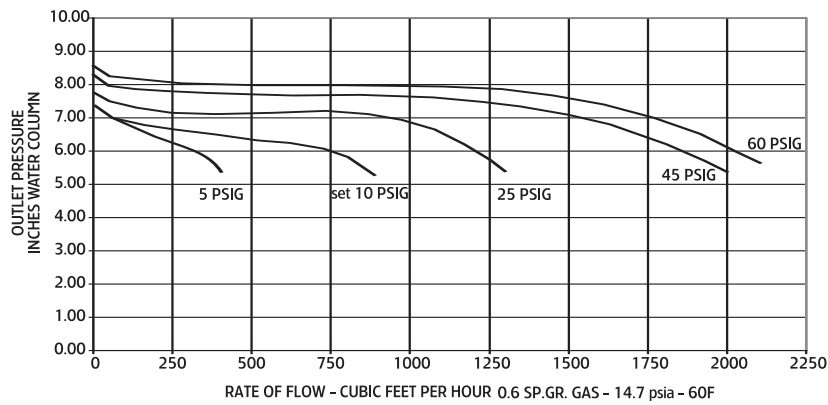

Relief Curves

Manufacturer	Actaris
Type and Model	B42R
Regulator:	Inlet Size 3/4" NPT
	Outlet Size 1" NPT
	Vent Size 1" NPT

Set Point 7.0" w.c. with 10 PSIG inlet @ 50 scfh.
All test results are reported at a base of 14.7 PSIA and 60 F.

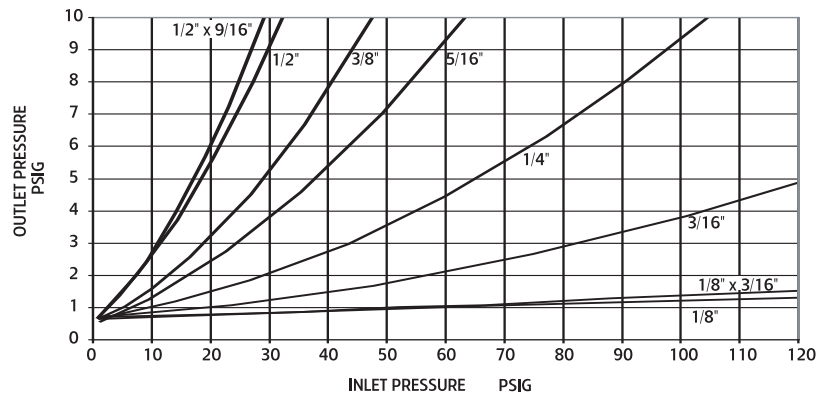

Note:

- A- Capacity in black outline generated with Brown Spring (762645)
- B- Change in outlet pressure for 10 PSIG inlet pressure change
- C- Outlet pressure increase required for lock up

B42 Residential Regulator - Models N, R

14" w.c. (34 mbar) - Capacity Table (2" Droop)


Blue Spring (762646)
Position 5
1" NPT Outlet

Capacities in scfh (m³/hr) - Orifice Size


Inlet Pressure PSIG Bar	1/8" (3.2 mm)	1/8 x 3/16" (3.2 x 4.8 mm)	3/16" (4.8 mm)	1/4" (6.4 mm)	5/16" (7.9 mm)	3/8" (9.5 mm)	1/2" (12.7 mm)	1/2 x 9/16" (12.7 x 14.3 mm)
1 (69 mbar)	-- --	-- --	-- --	190 (5.38)	270 (7.65)	280 (7.93)	550 (15.57)	575 (16.28)
2 (0.138)	-- --	190 (5.38)	220 (6.23)	300 (8.50)	430 (12.18)	450 (12.74)	820 (23.22)	860 (24.35)
3 (0.207)	160 (4.53)	215 (6.09)	300 (8.50)	380 (10.76)	550 (15.57)	560 (15.86)	1030 (29.17)	1080 (30.58)
5 (0.345)	230 (6.51)	280 (7.93)	390 (11.04)	550 (15.57)	710 (20.10)	740 (20.95)	1230 (34.83)	1310 (37.10)
10 (0.69)	370 (10.48)	390 (11.04)	600 (16.99)	820 (23.22)	1050 (29.73)	1130 (32.00)	1605 (45.45)	1680 (47.57)
15 (1.03)	460 (13.03)	525 (14.87)	800 (22.65)	1070 (30.30)	1340 (37.94)	1460 (41.34)	Orifice Inlet Pressure Rating Exceeded	
20 (1.38)	610 (17.27)	700 (19.82)	1000 (28.32)	1320 (37.38)	1630 (46.16)	1800 (50.97)		
30 (2.07)	800 (22.65)	890 (25.20)	1340 (37.94)	1750 (49.55)	1950 (55.22)			
40 (2.76)	1030 (29.17)	1150 (32.56)	1750 (49.55)	2050 (58.05)				
50 (3.45)	1200 (33.98)	1300 (36.81)	2010 (56.92)	2300 (65.13)				
60 (4.13)	1310 (37.10)	1425 (40.35)	2250 (63.71)	2500 (70.79)				
80 (5.51)	1900 (53.80)	2000 (56.63)	2580 (73.06)					
100 (6.89)	2200 (62.30)	2275 (64.42)	2700 (76.46)					
125 (8.61)	2200 (62.30)	2275 (64.42)	2900 (82.12)					

Inlet Effect B	0.12" w.c.	0.12" w.c.	0.22" w.c.	0.33" w.c.	0.50" w.c.	0.71" w.c.	2.3" w.c.	2.3" w.c.
Lock Up C	0.6" w.c.	0.6" w.c.	0.7" w.c.	0.8" w.c.	0.9" w.c.	1.0" w.c.	1.3" w.c.	1.3" w.c.

B42R REGULATOR PERFORMANCE 14" w.c. SET POINT

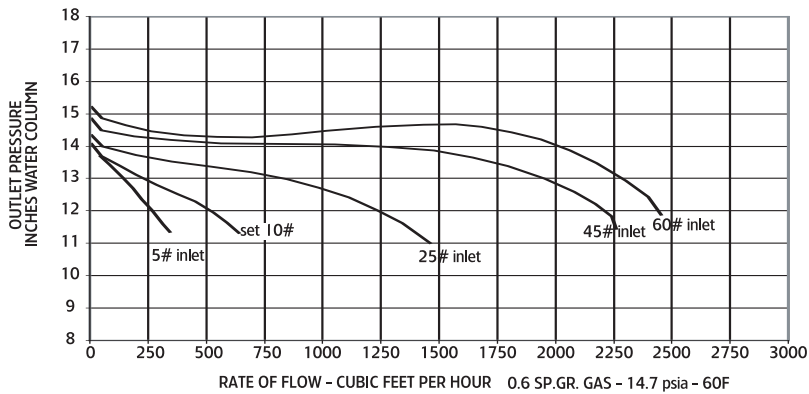

B42R RELIEF CURVES - LEVER DISCONNECT 14" w.c. SET POINT

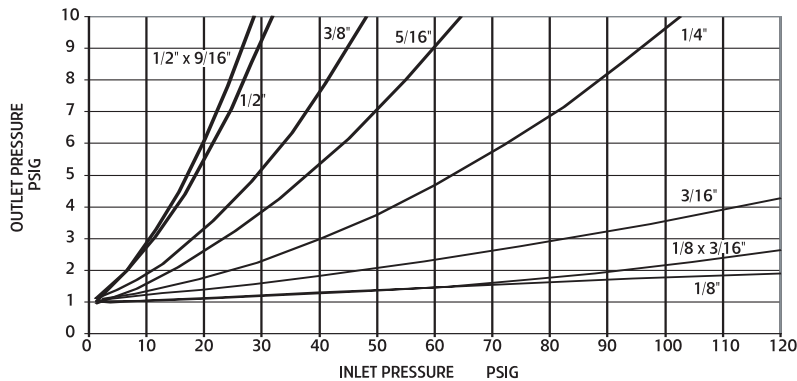

Typical Performance Curves

Manufacturer:	Actaris
Type and Model:	B42R
Regulator:	Inlet Size 3/4" NPT
	Outlet Size 1" NPT
	Orifice Size 3/16"
	Spring Blue (p/n 762646)

Set Point 14.0" w.c. with 10 PSIG inlet @ 50 scfh.
All test results are reported at a base of 14.7 PSIA and 60 F.

Relief Curves

Manufacturer	Actaris
Type and Model	B42R
Regulator:	Inlet Size 3/4" NPT
	Outlet Size 1" NPT
	Vent Size 1" NPT

Set Point 14.0" w.c. with 10 PSIG inlet @ 50 scfh.
All test results are reported at a base of 14.7 PSIA and 60 F.

Note:
B- Change in outlet pressure for 10 PSIG inlet pressure change
C- Outlet pressure increase required for lock up

B42 Residential Regulator - Models N, R

Silver Spring (762647)
Position 5
1" NPT Outlet

1 PSIG (69 mbar) - Capacity Table (1% Droop)

Capacities in scfh (m³/hr) - Orifice Size

Inlet Pressure PSIG Bar	1/8" (3.2 mm)		1/8 x 3/16" (3.2 x 4.8 mm)		3/16" (4.8 mm)		1/4" (6.4 mm)		5/16" (7.9 mm)		3/8" (9.5 mm)		1/2" (12.7 mm)		1/2 x 9/16" (12.7 x 14.3 mm)	
2 (0.14)	--	--	--	--	230 (6.51)	300 (8.50)	330 (9.34)	420 (11.89)	455 (12.88)	475 (13.45)						
3 (0.21)	160 (4.53)	225 (6.37)	300 (8.50)	385 (10.90)	490 (13.88)	650 (18.41)	700 (19.82)	790 (22.37)	1035 (29.31)							
5 (0.34)	230 (6.51)	300 (8.50)	385 (10.90)	490 (13.88)	650 (18.41)	700 (19.82)	790 (22.37)	1035 (29.31)								
10 (0.69)	365 (10.34)	425 (12.03)	570 (16.14)	770 (21.80)	1020 (28.88)	1130 (32.00)	1145 (32.42)	1575 (44.60)								
15 (1.03)	460 (13.03)	550 (15.57)	770 (21.80)	1050 (29.73)	1270 (35.96)	1410 (39.93)										
20 (1.38)	570 (16.14)	675 (19.11)	980 (27.75)	1350 (38.23)	1550 (43.89)	1710 (48.42)										
30 (2.07)	780 (22.09)	875 (24.78)	1330 (37.66)	1850 (52.39)	2000 (56.63)											
40 (2.76)	980 (27.75)	1100 (31.15)	1760 (49.84)	2250 (63.71)												
50 (3.45)	1150 (32.56)	1225 (34.69)	2140 (60.60)	2600 (73.62)												
60 (4.14)	1270 (35.96)	1350 (38.23)	2400 (67.96)	2850 (80.70)												
80 (5.52)	1700 (48.14)	1900 (53.80)	2890 (81.84)													
100 (6.89)	1900 (53.80)	2150 (60.88)	3150 (89.20)													
125 (8.62)	2100 (59.47)	2275 (64.42)	3300 (93.45)													

Orifice Inlet Pressure Rating Exceeded

Capacity Table (2% Droop)

Capacities in scfh (m³/hr) - Orifice Size

Inlet Pressure PSIG Bar	1/8" (3.2 mm)		1/8 x 3/16" (3.2 x 4.8 mm)		3/16" (4.8 mm)		1/4" (6.4 mm)		5/16" (7.9 mm)		3/8" (9.5 mm)		1/2" (12.7 mm)		1/2 x 9/16" (12.7 x 14.3 mm)	
2 (0.14)			250 (7.08)	480 (13.59)	610 (17.27)	700 (19.82)	790 (22.37)	850 (24.07)								
3 (0.21)	170 (4.81)	225 (6.37)	400 (11.33)	620 (17.56)	880 (24.92)	980 (27.75)	1070 (30.30)	1120 (31.71)								
5 (0.34)	260 (7.36)	325 (9.20)	570 (16.14)	810 (22.94)	1060 (30.02)	1200 (33.98)	1265 (35.82)	1600 (45.31)								
10 (0.69)	410 (11.61)	500 (14.16)	840 (23.79)	1270 (35.96)	1600 (45.31)	1850 (52.39)	2020 (57.20)	2220 (62.86)								
15 (1.03)	510 (14.44)	600 (16.99)	1050 (29.73)	1600 (45.31)	2000 (56.63)	2175 (61.59)										
20 (1.38)	610 (17.27)	750 (21.24)	1260 (35.68)	2020 (57.20)	2400 (67.96)	2500 (70.79)										
30 (2.07)	780 (22.09)	875 (24.78)	1630 (46.16)	2600 (73.62)	2900 (82.12)											
40 (2.76)	980 (27.75)	1100 (31.15)	2000 (56.63)	3000 (84.95)												
50 (3.45)	1150 (32.56)	1125 (31.86)	2410 (68.24)	3300 (93.45)												
60 (4.14)	1270 (35.96)	1350 (38.23)	2750 (77.87)	3450 (97.69)												
80 (5.52)	1700 (48.14)	1900 (53.80)	3410 (96.56)													
100 (6.89)	1900 (53.80)	2150 (60.88)	3600 (101.94)													
125 (8.62)	2100 (59.47)	2275 (64.42)	3800 (107.60)													

Orifice Inlet Pressure Rating Exceeded

Inlet Effect B	0.01 PSIG	0.01 PSIG	0.01 PSIG	0.02 PSIG	0.03 PSIG	0.04 PSIG	0.05 PSIG	0.05 PSIG
Lock Up C	0.05 PSIG	0.05 PSIG	0.07 PSIG	0.08 PSIG	0.09 PSIG	0.11 PSIG	0.13 PSIG	0.13 PSIG


Note:
B- Change in outlet pressure for 10 PSIG inlet pressure change
C- Outlet pressure increase required for lock up

B42 Residential Regulator - Models N, R

1 PSIG (69 mbar)

B42R REGULATOR PERFORMANCE

1 PSIG SET POINT

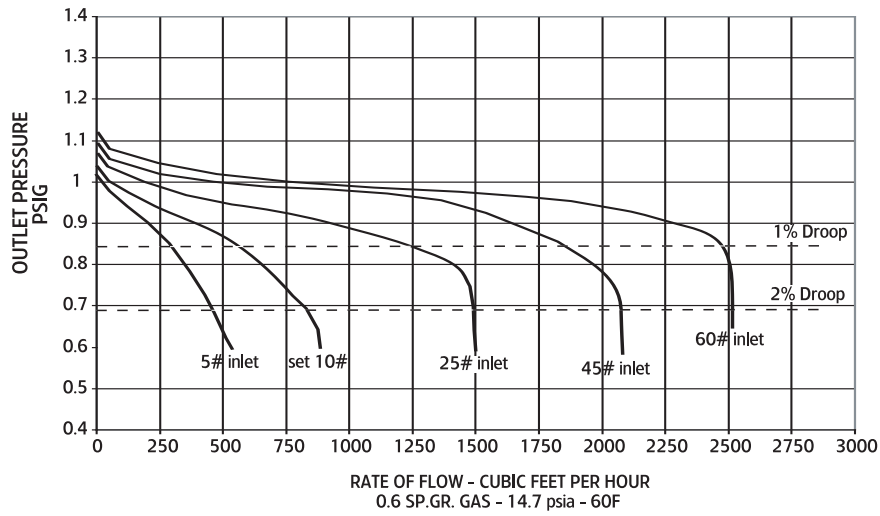


Typical Performance Curves

Manufacturer:	Actaris
Type and Model:	B42R
Regulator:	Inlet Size 3/4" NPT
	Outlet Size 1" NPT
	Orifice Size 3/16"
	Spring Silver (p/n 762647)

Set Point 1 PSIG with 10 PSIG inlet @ 50 scfh.
All test results are reported at a base of 14.7 PSIA and 60 F.

B-42 RELIEF CURVES-LEVER DISCONNECT

1 PSIG SET POINT

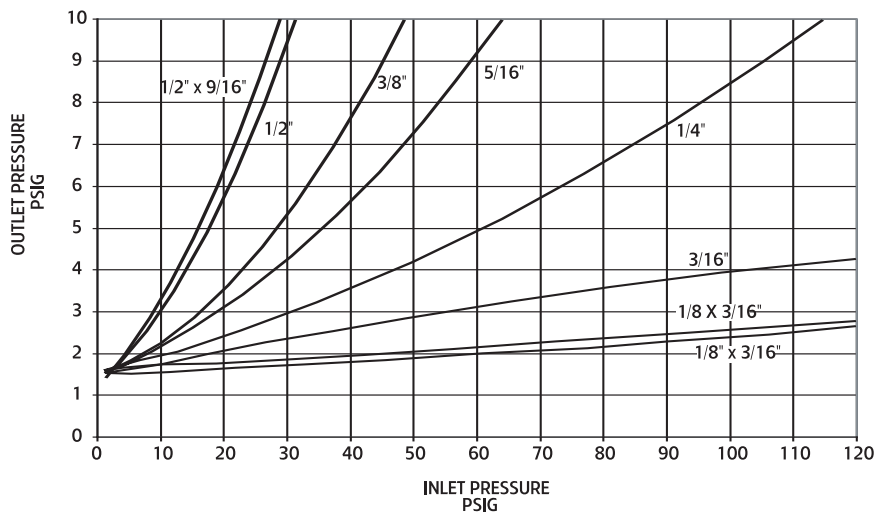

Relief Curves

Manufacturer	Actaris
Type and Model	B42R
Regulator:	Inlet Size 3/4" NPT
	Outlet Size 1" NPT
	Vent Size 1" NPT

Set Point 1 PSIG with 10 PSIG inlet @ 50 scfh.
All test results are reported at a base of 14.7 PSIA and 60 F.

B42 Residential Regulator - Models N, R

Yellow/Black Spring (762650)
Position 5
1" NPT Outlet

2 PSIG (0.14 bar) - Capacity Table (1% Droop)

Capacities in scfh (m³/hr) - Orifice Size

Inlet Pressure PSIG Bar	1/8" (3.2 mm)		1/8 x 3/16" (3.2 x 4.8 mm)		3/16" (4.8 mm)		1/4" (6.4 mm)		5/16" (7.9 mm)		3/8" (9.5 mm)		1/2" (12.7 mm)		1/2 x 9/16" (12.7 x 14.3 mm)	
3 (0.21)	100 (2.83)	120 (3.40)	160 (4.53)	200 (5.66)	270 (7.65)	280 (7.93)	320 (9.06)	340 (9.63)								
5 (0.34)	135 (3.82)	170 (4.81)	230 (6.51)	290 (8.21)	400 (11.33)	420 (11.89)	480 (13.59)	575 (16.28)								
10 (0.69)	230 (6.51)	295 (8.35)	370 (10.48)	490 (13.88)	730 (20.67)	750 (21.24)	840 (23.79)	1075 (30.44)								
15 (1.03)	300 (8.50)	415 (11.75)	500 (14.16)	650 (18.41)	1000 (28.32)	1000 (28.32)										
20 (1.38)	370 (10.48)	550 (15.57)	600 (16.99)	840 (23.79)	1200 (33.98)	1200 (33.98)										
30 (2.07)	500 (14.16)	700 (19.82)	900 (25.49)	1230 (34.83)	1600 (45.31)											
40 (2.76)	600 (16.99)	880 (24.92)	1100 (31.15)	1600 (45.31)												
50 (3.45)	800 (22.65)	1090 (30.87)	1400 (39.64)	1940 (54.93)												
60 (4.14)	950 (26.90)	1250 (35.40)	1600 (45.31)	2240 (63.43)												
80 (5.52)	1200 (33.98)	1730 (48.99)	2000 (56.63)													
100 (6.89)	1600 (45.31)	1900 (53.80)	2400 (67.96)													
125 (8.62)	2100 (59.47)	2500 (70.79)	3300 (93.45)													

Orifice Inlet Pressure Rating Exceeded

Capacity Table (2% Droop)

Capacities in scfh (m³/hr) - Orifice Size

Inlet Pressure PSIG Bar	1/8" (3.2 mm)		1/8 x 3/16" (3.2 x 4.8 mm)		3/16" (4.8 mm)		1/4" (6.4 mm)		5/16" (7.9 mm)		3/8" (9.5 mm)		1/2" (12.7 mm)		1/2 x 9/16" (12.7 x 14.3 mm)	
3 (0.21)	130 (3.68)	150 (4.25)	240 (6.80)	320 (9.06)	450 (12.74)	490 (13.88)	560 (15.86)	645 (18.26)								
5 (0.34)	180 (5.10)	255 (7.22)	340 (9.63)	460 (13.03)	680 (19.26)	730 (20.67)	925 (26.19)	1085 (30.72)								
10 (0.69)	320 (9.06)	420 (11.89)	600 (16.99)	850 (24.07)	1240 (35.11)	1280 (36.25)	1540 (43.61)	1710 (48.42)								
15 (1.03)	440 (12.46)	530 (15.01)	850 (24.07)	1150 (32.56)	1600 (45.31)	1600 (45.31)										
20 (1.38)	530 (15.01)	590 (16.71)	1040 (29.45)	1420 (40.21)	2000 (56.63)	2000 (56.63)										
30 (2.07)	710 (20.10)	770 (21.80)	1430 (40.49)	1920 (54.37)	2400 (67.96)											
40 (2.76)	875 (24.78)	930 (26.33)	1700 (48.14)	2390 (67.68)												
50 (3.45)	1050 (29.73)	1140 (32.28)	2100 (59.47)	2800 (79.29)												
60 (4.14)	1200 (33.98)	1300 (36.81)	2400 (67.96)	3130 (88.63)												
80 (5.52)	1500 (42.48)	1825 (51.68)	2700 (76.46)													
100 (6.89)	1850 (52.39)	1950 (55.22)	3000 (84.95)													
125 (8.62)	2100 (59.47)	2600 (73.62)	3500 (99.11)													

Orifice Inlet Pressure Rating Exceeded

Inlet Effect B	0.01 PSIG	0.01 PSIG	0.02 PSIG	0.03 PSIG	0.03 PSIG	0.04 PSIG	0.06 PSIG	0.06 PSIG
Lock Up C	0.06 PSIG	0.06 PSIG	0.08 PSIG	0.09 PSIG	0.10 PSIG	0.12 PSIG	0.14 PSIG	0.14 PSIG


Note:
B- Change in outlet pressure for 10 PSIG inlet pressure change
C- Outlet pressure increase required for lock up

B42 Residential Regulator - Models N, R

2 PSIG (0.14 bar) -

B42R REGULATOR PERFORMANCE

2 PSIG SET POINT

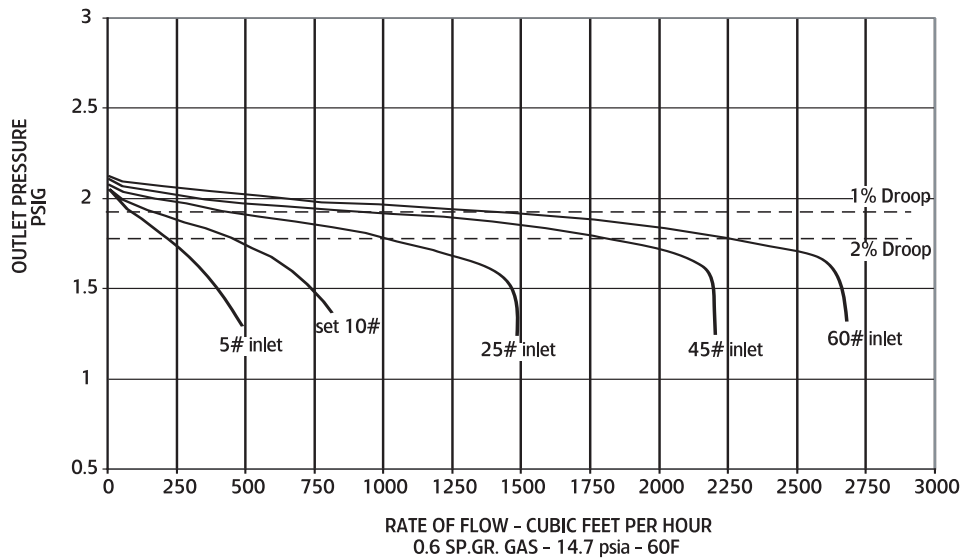


Typical Performance Curves

Manufacturer:	Actaris
Type and Model:	B42R
Regulator: Inlet Size:	3/4" NPT
Outlet Size:	1" NPT
Orifice Size:	3/16"
Spring:	Yellow/Black (p/n 762650)

Set Point 2 PSIG with 10 PSIG inlet @ 50 scfh.
All test results are reported at a base of 14.7 PSIA and 60 F.

B-42 RELIEF CURVES-LEVER DISCONNECT

2 PSIG SET POINT

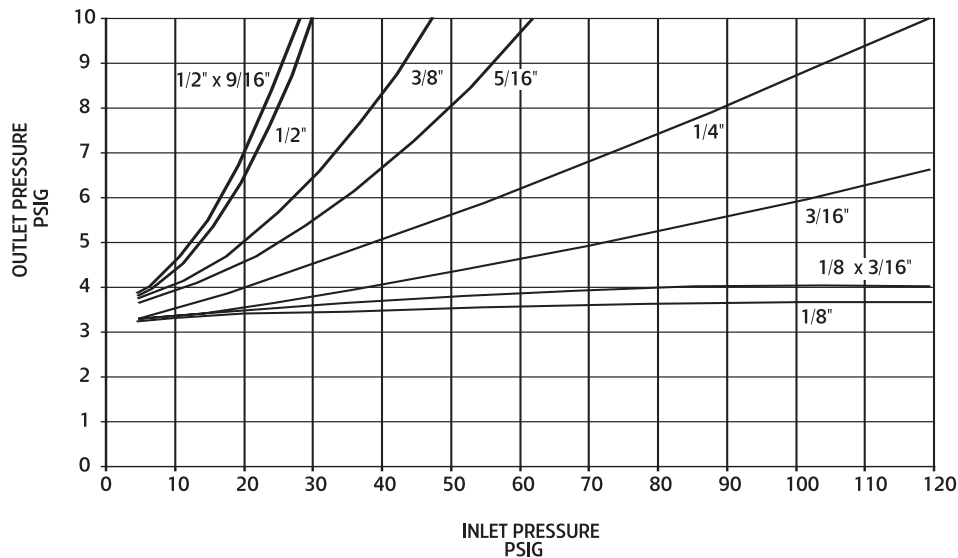

Relief Curves

Manufacturer:	Actaris
Type and Model:	B42R
Regulator: Inlet Size:	3/4" NPT
Outlet Size:	1" NPT
Vent Size:	1" NPT

Set Point 2 PSIG with 10 PSIG inlet @ 50 scfh.
All test results are reported at a base of 14.7 PSIA and 60 F.

B42HP Residential Regulator - Models N, R

White Spring (762647)

Position 5

1" NPT Outlet

5 PSIG (0.34 bar) Capacity Table (1% Droop)

Capacities in scfh (m³/hr) - Orifice Size

Inlet Pressure PSIG Bar	1/8" (3.2 mm)	3/16" (4.8 mm)	1/4" (6.4 mm)	5/16" (7.9 mm)	3/8" (9.5 mm)	1/2" (12.7 mm)	
10 (0.69)	175 (4.96)	240 (6.80)	300 (8.50)	355 (10.05)	420 (11.89)	610 (17.27)	
15 (1.03)	130 (3.68)	160 (4.53)	225 (6.37)	275 (7.79)	320 (9.06)		
20 (1.38)	160 (4.53)	195 (5.52)	260 (7.36)	305 (8.64)	380 (10.76)		
30 (2.07)	190 (5.38)	255 (7.22)	315 (8.92)	400 (11.33)			
40 (2.76)	220 (6.23)	270 (7.65)	390 (11.04)				
50 (3.45)	255 (7.22)	300 (8.50)	450 (12.74)				
60 (4.14)	275 (7.79)	390 (11.04)	550 (15.57)				
80 (5.52)	349 (9.86)	478 (13.50)					
100 (6.89)	422 (11.92)	579 (16.36)					
125 (8.62)	514 (14.52)	705 (19.92)					

Orifice Inlet Pressure Rating
Exceeded

Capacity Table (2% Droop)

Capacities in scfh (m³/hr) - Orifice Size

Inlet Pressure PSIG Bar	1/8" (3.2 mm)	3/16" (4.8 mm)	1/4" (6.4 mm)	5/16" (7.9 mm)	3/8" (9.5 mm)	1/2" (12.7 mm)	
10 (0.69)	175 (4.96)	240 (6.80)	300 (8.50)	355 (10.05)	420 (11.89)	610 (17.27)	
15 (1.03)	230 (6.51)	365 (10.34)	430 (12.18)	555 (15.72)	650 (18.41)		
20 (1.38)	255 (7.22)	445 (12.60)	525 (14.87)	650 (18.41)	770 (21.80)		
30 (2.07)	370 (10.48)	570 (16.14)	710 (20.10)	950 (26.90)			
40 (2.76)	405 (11.47)	745 (21.10)	940 (26.62)				
50 (3.45)	445 (12.60)	855 (24.21)	1160 (32.85)				
60 (4.14)	535 (15.15)	925 (26.13)	1450 (41.06)				
80 (5.52)	714 (20.17)	1003 (28.33)					
100 (6.89)	865 (24.44)	1215 (34.32)					
125 (8.62)	1054 (29.77)	1480 (41.81)					

Orifice Inlet Pressure Rating
Exceeded

Inlet Effect ^B	0.05 PSIG	0.08 PSIG	0.10 PSIG	0.12 PSIG	0.14 PSIG	0.20 PSIG	
Lock Up ^C	0.08 PSIG	0.10 PSIG	0.11 PSIG	0.12 PSIG	0.14 PSIG	0.16 PSIG	

Note:

B- Change in outlet pressure for 10 PSIG inlet pressure change


C- Outlet pressure increase required for lock up

B42HP Residential Regulator - Models N, R

5 PSIG (0.34 bar)

B42 REGULATOR PERFORMANCE

5 PSIG SET POINT

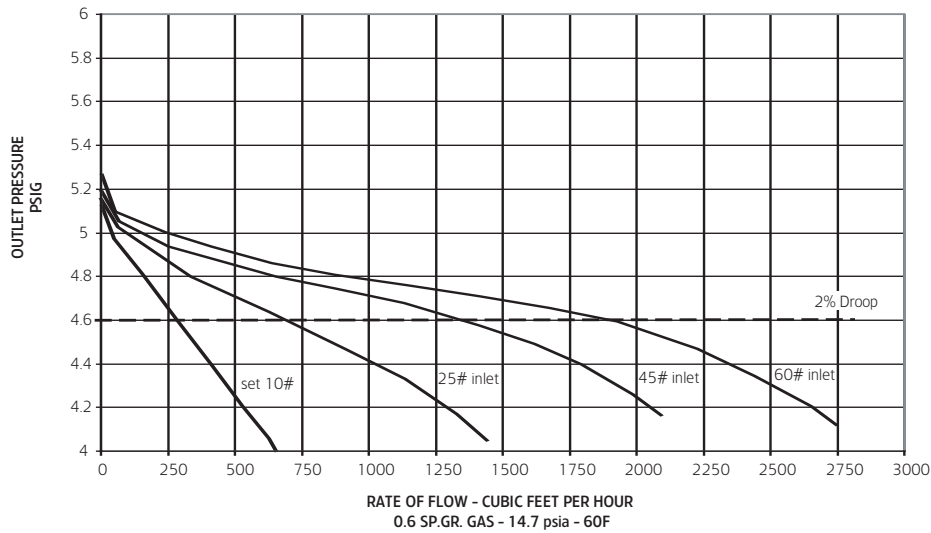


Typical Performance Curves

Manufacturer:	Actaris
Type and Model:	B42RHP
Regulator:	Inlet Size 3/4" NPT
	Outlet Size 1" NPT
	Orifice Size 3/16"
	Spring White (p/n 762137)

Set Point 5 PSIG with 10 PSIG inlet @ 50 scfh.
All test results are reported at a base of 14.7 PSIA and 60 F.

B-42 RELIEF CURVES-LEVER DISCONNECT

5 PSIG SET POINT

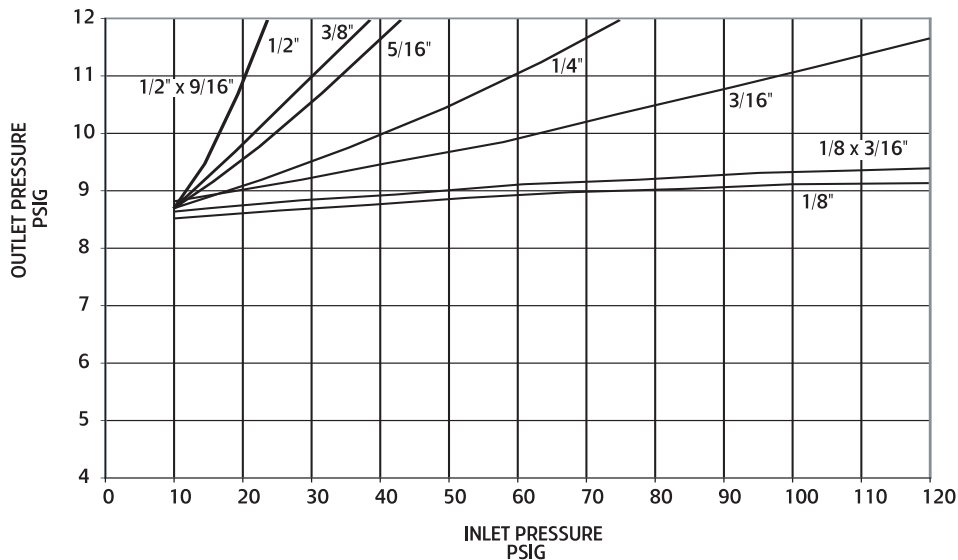


Relief Curves


Manufacturer	Actaris
Type and Model	B42RHP
Regulator:	Inlet Size 3/4" NPT
	Outlet Size 1" NPT
	Vent Size 1" NPT

Set Point 5 PSIG with 10 PSIG inlet @ 50 scfh.
All test results are reported at a base of 14.7 PSIA and 60 F.

B42R Parts Diagram

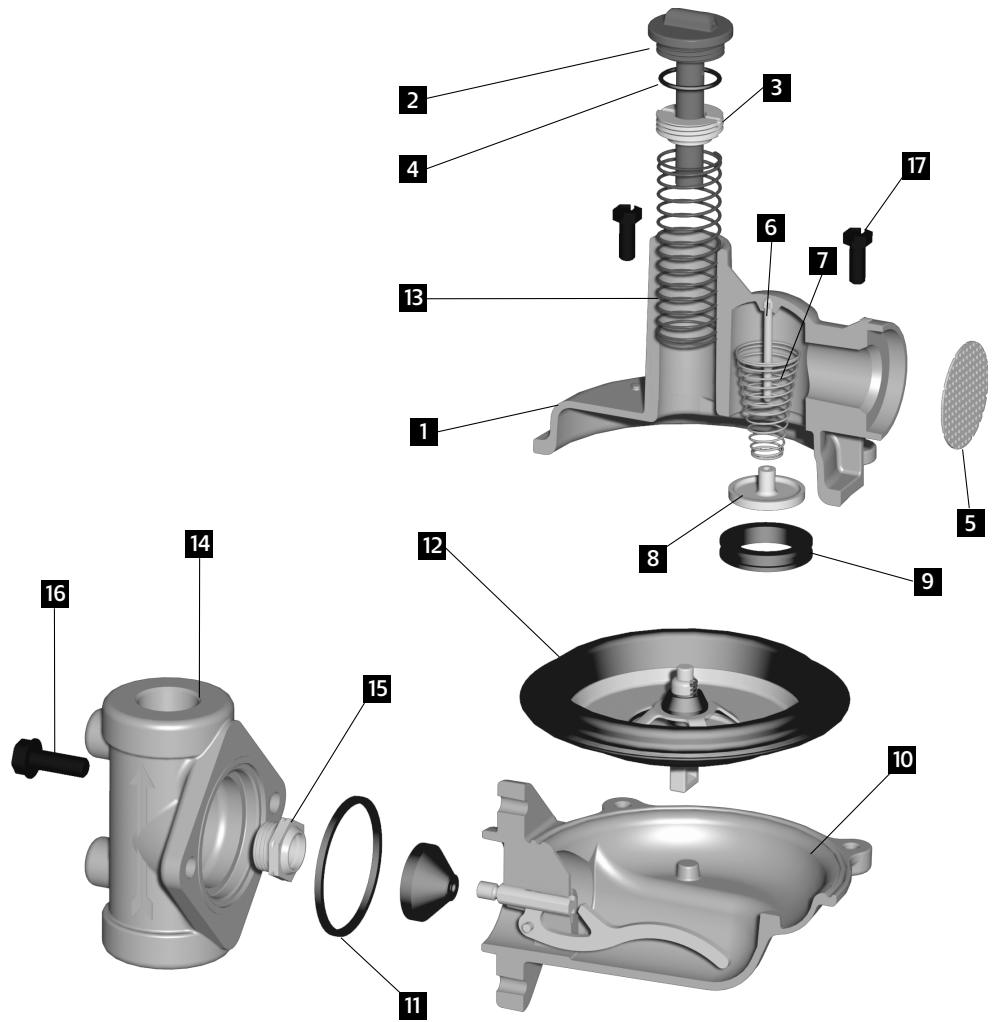

Operating Principle

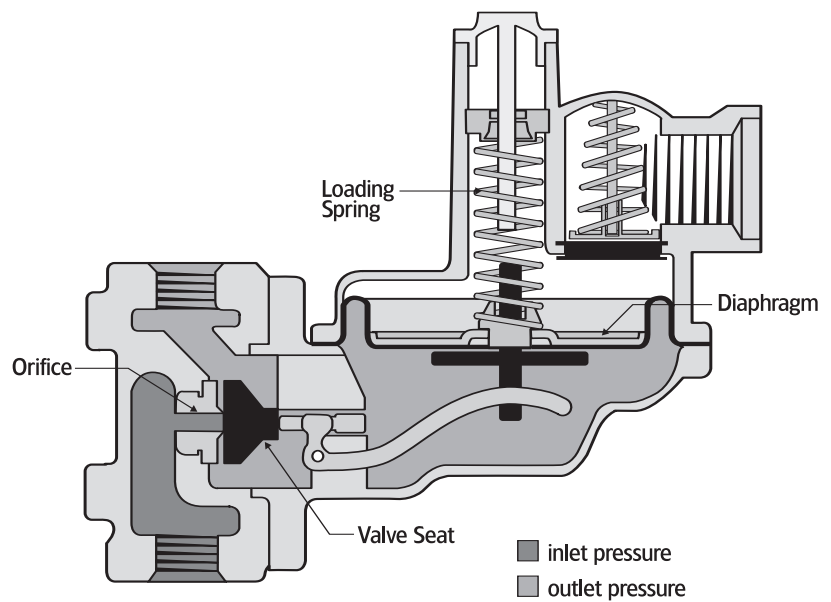

Parts List

NO.	PART#	QTY		DESCRIPTION
		N	R	
1		1	1	Upper Diaphragm Case
	753443			Std. 1" Vent
	753442			Std. 3/4" Vent
	753445			HP. 1" Vent
	753444			HP. 3/4" Vent
2		1	1	Seal Cap
	760260			Seal Cap - Gray
	760261			Seal Cap - Red
	760262			Seal Cap - Green
3	760215	1	1	Adjustment Screw - Std
	760217	1	1	Adjustment Screw - HP
4	765501	1	1	Seal Cap Gasket
5	762933	1	1	Vent Screen
6	754834	1	1	Vent Valve Disc Pin
7	762651	1	1	Vent Valve Spring
8	765181	1	1	Vent Valve Disc
9	765685	1	1	Vent Valve Seat
10	715075	1	1	Lower Diaphragm Case Assembly
11		1	1	Valve Seat
	765051			Valve Seat - Standard
	765053			Valve Seat - Silicone
				Diaphragm Assembly Complete
12	720085		1	Diaphragm - Standard Relief (R)
	720091	1		Diaphragm - Non-Relief (N)
	761005	1	1	Upper Diaphragm Plate
	75606102		1	Lower Diaphragm Plate (R)
	75606103	1		Lower Diaphragm Plate (N)
	761401		1	Relief Spring Retaining Clip
	755513	1		Nut (N)
	755801	1		Washer (N)
	762653		1	Relief Spring - 7" W.C. - Std.
	762655			Relief Spring - 5" W.C.
	754911	1	1	Stop Stem Guide Bushing
13		1	1	Adjustment Springs - Specify Color
	762649			5-7" W.C. Green
	762645			6-8" W.C. Brown
	762646			8-14" W.C. Blue
	762647			12-28 W.C Silver
	762650			1-2 PSIG Yellow/Black
	762131			2-4 PSIG Yellow* (HP)
	762137			4-5 PSIG White* (HP)
14		1	1	Valve Body-SpecifyType and Size Straight
	750586			1/2" x 1/2" NPT
	750587			1/2" x 1/2" NPT w/ 1/8" In. PP
	750588			1/2" x 1/2" NPT w/ 1/8" Out. PP
	750527			3/4" x 3/4" NPT
	750528			3/4" x 3/4" NPT w/ 1/8" In. PP
	750529			3/4" x 3/4" NPT w/ 1/8" Out. PP
	750530			3/4" x 3/4" NPT w/ In/Out PP

NO.	PART#	QTY		DESCRIPTION
		N	R	
	750531			3/4" x 1" NPT
	750533			3/4" x 1" NPT w/ 1/8" Out. PP
	750534			3/4" x 1" NPT w/ In/Out PP
	750567			3/4" x 1-1/4" NPT
	750568			3/4" x 1-1/4" NPT w/ 1/8" In. PP
	750569			3/4" x 1-1/4" NPT w/ 1/8" Out. PP
	750535			1" x 1" NPT
	750536			1" x 1" NPT w/ 1/8" In. PP
	750537			1" x 1" NPT w/ 1/8" Out. PP
	750538			1" x 1" NPT w/ In/Out PP
	750570			1" x 1-1/4" NPT
	750571			1" x 1-1/4" NPT w/ 1/8" In. PP
	750572			1" x 1-1/4" NPT w/ 1/8" Out. PP
	750573			1-1/4" x 1-1/4" NPT
	750574			1-1/4" x 1-1/4" NPT w/ 1/8" In. PP
	750575			1-1/4" x 1-1/4" NPT w/ 1/8" Out. PP
				90° Angle Body
	750541			3/4" x 3/4" NPT
	750542			3/4" x 3/4" NPT w/ 1/8" In. PP
	750543			3/4" x 1" NPT
	750544			3/4" x 1" NPT w/ 1/8" In. PP
	750545			1" x 1" NPT
	750546			1" x 1" NPT w/ In/Out PP Plug
				Compact - Bottom Rear Entry
	750576			3/4" x 3/4" NPT
	750578			3/4" x 3/4" NPT w/ 1/8" In. PP
	750577			3/4" x 1" NPT
	750579			3/4" x 1" NPT w/ 1/8" In. PP
15		1	1	Orifice - Specify size
	757611			1/8" - Aluminum
	757641			1/8" - Brass
	757651			1/8" x 3/16" - Aluminum
	757619			3/16" - Aluminum
	757643			3/16" - Brass
	757623			1/4" - Aluminum
	757645			1/4" - Brass
	757627			5/16" - Aluminum
	757631			3/8" - Aluminum
	757453			1/2" - Aluminum
	75767101			1/2" x 9/16" - Aluminum
	769417	1	1	Legal Warning Label
16	8006701	2	2	Valve Body Screw 5/16 - 18 x 7/8 LG.
17	010323	4	4	Case Screw / - 20 x fl LG.
	765605	1	1	Valve Body Gasket
NO.	PART#	DESCRIPTION		
	799051	Adjustment Tool		
NO.	PART#	TORQUE SPECIFICATIONS		
	010322	Case Screws: 35 - 45 in. lb.		
	765605	Valve Body Screws: 85 - 115 in. lb		
	see above	Orifice: 450 - 600 in. lb.		

Installation

SAFETY NOTES:

- ▶ **A.** The maximum inlet pressure for this regulator is dependent upon the size of the orifice and model designation. The non-relief models are limited to 60 PSIG maximum inlet pressure unless additional safety devices are used as outlined in DOT code, OPS, Part 192, section 192.197.
- ▶ **B.** When these models are used on liquid petroleum gases, they should be restricted to second-stage pressure reduction in the gaseous phase.

- ▶ **A.** Make certain all shipping plugs are removed from the inlet, outlet and vent of any regulator before installation.
- ▶ **B.** When installing the regulator, the inside of the piping and the regulator inlet and outlet are to be clean, free of dirt, pipe dope and other debris to prevent entry into the regulator which could cause loss of pressure control.
- ▶ **C.** The pipe joint sealant should be applied on the male threads of the pipe. Do not use any pipe joint material on the female threads of the regulator or it could become lodged in the regulator causing possible loss of pressure control.
- ▶ **D.** Gas must flow through the valve body of the regulator in the same direction as the arrow cast on the body, or the outlet side of the regulator may be over pressured and damaged.
- ▶ **E.** The diaphragm casing may be mounted in any of four (4) positions relative to the body.
- ▶ **F.** When the regulator is installed OUTDOORS, the vent must always be positioned so that rain, snow, moisture or foreign particles cannot enter the vent opening. It is recommended that the vent be positioned to face downward so as to avoid entry of water or other matter which could interfere with the proper operation of the regulator. The vent should be located away from building eaves, window openings, building air intakes and above the expected snow level at the site. The vent opening should be inspected periodically to insure it does not become blocked by foreign material.
- ▶ **G.** When the regulator is installed INDOORS, the vent must be piped to the outside atmosphere while using the shortest length of pipe, the least number of elbows, and having as large a pipe diameter as the vent size or larger. USING VENT PIPE ANY SIZE SMALLER THAN THE VENT CONNECTION WILL LIMIT THE REGULATOR'S INTERNAL RELIEF VALVE CAPACITY. The outlet end of the pipe must be protected from moisture and the entrance of foreign particles. The regulator should be specified by the user with the size vent and pipe threads desired to make the vent pipe connection.

START-UP PROCEDURE

- ▶ **A.** A pressure gauge should be mounted downstream of the regulator to monitor the downstream pressure.
- ▶ **B.** With the downstream valve closed, slowly open the inlet valve. The outlet pressure should rise to slightly greater than the set-point.
- ▶ **C.** Be sure there are no leaks and all connections are tight.
- ▶ **D.** The regulator has been preset at the factory to match specifications given when it was ordered. The outlet pressure may be adjusted by removing the seal cap on top of the spring housing and adjusting the ferrule or screw inside the spring housing using a ratchet with a socket and an extension. With a small amount of gas flowing through the regulator, rotate the ferrule clock-wise to raise the outlet pressure and counter-clockwise to lower the outlet pressure.
- ▶ **E.** After the desired outlet pressure is achieved, replace the seal cap, recheck for leaks. The regulator is ready for operation.

SAFETY WARNING:


- This product, as of the date of manufacture, is designed and tested to conform to all governmental or industry safety standards then existing as may apply to the manufacturer.
- ▶ The purchaser and user of this product are warned that compliance with the manufacturer's instructions and procedures is required in order to avoid the hazards of leaking gas resulting from improper installation, start-up or use of this product, and further, that all area fire control, building codes or other safety regulations which regulate or concern the application, installation, operation or general use of this product should be complied with.
 - ▶ In order to insure the safe and proper operation of this product, the manufacturer recommends that this product be installed by a qualified installer.

Vent Lines for Regulators

When constructing vent lines to be attached to regulators installed indoors, a few basic rules must be followed:

1. Never use pipe sizes smaller than the vent size itself; anything smaller will restrict the flow of gas. If a long run must be used, it is advisable to increase the pipe one size every ten feet in order to keep the flow restriction as low as possible.
2. Keep the length of vent line as short as possible to minimize the restriction as well as reduce the tendency for the vent piping to cause pulsation of the regulator.
3. Support the vent pipe so there is no strain on the regulator diaphragm case.
4. Always point the end of the vent pipe located outside the building in the downward position to reduce the possibility of rain, snow, sleet etc. from entering the pipe. A bug screen should be installed in the end of the pipe.
5. The terminus of the vent line must not be located near windows, fans, etc. See the installation instructions furnished with the regulator.
6. All applicable codes and regulations must be adhered to.
7. Vent pipe may cause regulator pulsation. If this situation occurs, please consult your regulator representative or the factory.
8. It is strongly recommended that a separate vent line be run for each regulator; a header with other devices installed in it can cause regulator malfunction.
9. If approved by the authority having jurisdiction, the vent lines may be manifolded in accordance with accepted engineering practices to minimize back pressure in the event of diaphragm failure.

Assembly Positions

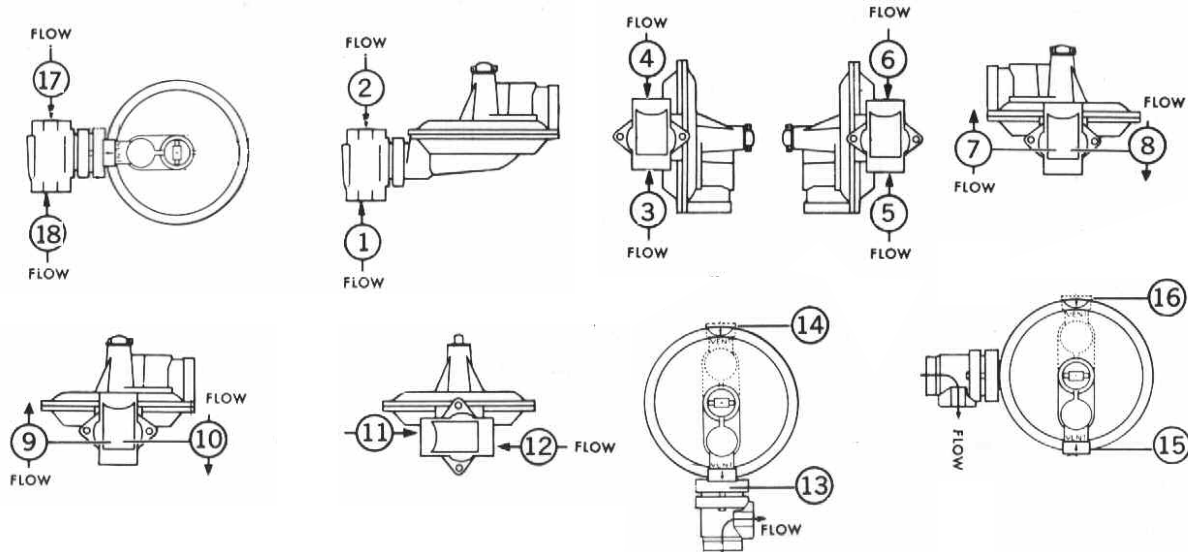

► Positions 13 - 15 are achieved with 90° Angle Body

Limited Warranty

Actaris U.S. Gas, Inc., 970 Highway 127 North, Owenton, Kentucky 40359-9302, warrants this gas product against defects in materials and workmanship for the earlier of one (1) year from the date the product is shipped by Actaris or a period of one year from the date the product is installed by Actaris at the original purchaser's site. During such one-year period, provided that the original purchaser continues to own the product, Actaris will, at its sole option, repair any defects, replace the product or repay the purchase price.

- This warranty will be void if the purchaser fails to observe the procedures for installation, operation or service of the product as set forth in the Operating Manual and Specifications for the product or if the defect is caused by tampering, physical abuse or misuse of the product.

► Ordering Information

Specify:

1. Inlet and Outlet Connection Size and Type
2. Model Number
3. Outlet pressure desired
4. Inlet pressure range
5. Type of gas and maximum capacity required
6. Assembly position number (see page 15)
7. Vent size
8. Special requirements such as tagging, 1/8" pipe plug tap, seal wire, etc.

• ACTARIS SPECIFICALLY DISCLAIMS ALL IMPLIED WARRANTIES INCLUDING THOSE OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. UNDER NO CIRCUMSTANCES WILL ACTARIS BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES OF ANY KIND WHATSOEVER.

- Actaris' liability for any claim of any kind, including negligence and breach of warranty for the sale and use of any product covered by or furnished, shall in no case exceed the price allocable to the product or part thereof which gives rise to the claim.

- In the event of a malfunction of the product, consult your Actaris Service Representative or Actaris U.S. Gas, Inc., 970 Highway 127 North, Owenton, Kentucky 40359-9302.

See Actaris Terms and Conditions of Sale for the full and complete terms of the limited warranty.

► Reference Information

- Product Overview, JOB

Actaris U.S. Gas, Inc.

970 Highway 127 North
Owenton, Kentucky 40359-9302, USA
For more information, www.actaris.com

tel +1 800 490 0657

+1 502 484 5747

fax +1 502 484 6223