


TOUGH TRENCHLESS TOOLS

- Ideal for **water**, **gas**, and **cable** installations
- Available in **2"**, **2.5"**, **3"** and **4"** diameters
- Barrel bored from **solid steel** (not tubing)
- Industry Leading **3 Year Warranty!**

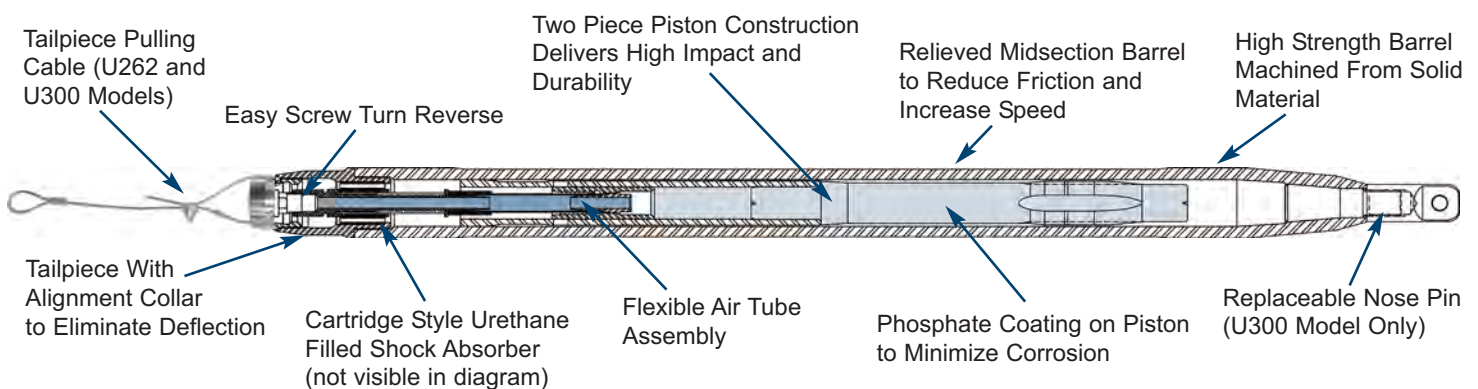

Footage Tools' pneumatic piercing tools have been constructed with the highest level of quality in mind.

All **BIG SHOTS** are CNC machined to exact dimensional tolerance from a solid billet of nickel chromoly steel and fully heat treated for superior strength and durability. Our pistons are designed to withstand high impact conditions, are wear resistant and treated with a phosphate coating to minimize corrosion and increase service life.

Other features include an easily replaceable cartridge style shock absorber and a flexible air tube assembly to minimize internal deflection.

Model Specifications




Model	Dia.	Weight	Length	Avg. Air Consumption
U 215	2"	23 lbs	35"	25 CFM @ 80-100 PSI
U 262	2.5"	56 lbs	55"	50 CFM @ 90-110 PSI
U 300	3"	75 lbs	55"	50 CFM @ 90-110 PSI
U 400	4"	108 lbs	59"	75 CFM @ 90-110 PSI

Accessories

Part Number	Description
L110-A001	11 oz. in-line lubricator for optimal lubrication of tool.
L300-4L	4 litres of synthetic lubricant prevents icing, wear and corrosion.
U50-A1	50' air hose, rubber coated steel braid construction for added life span.

Part	Compatible Model and Part Number
Expanders	4.5" dia. for U300 (U300-27) 5.5" dia. for U400 (U400-28)
Cutting Head	U300 (U300-33)
Pipe Puller Extension	For 2" PE Pipe U300 (U300-21)
Tailpiece Pulling Cable	U262 and U300 (U300-26)
Tailpiece Wrench	U215 (U215-23), U262 (U262-23), U300 (U300-23), U400 (U400-23)

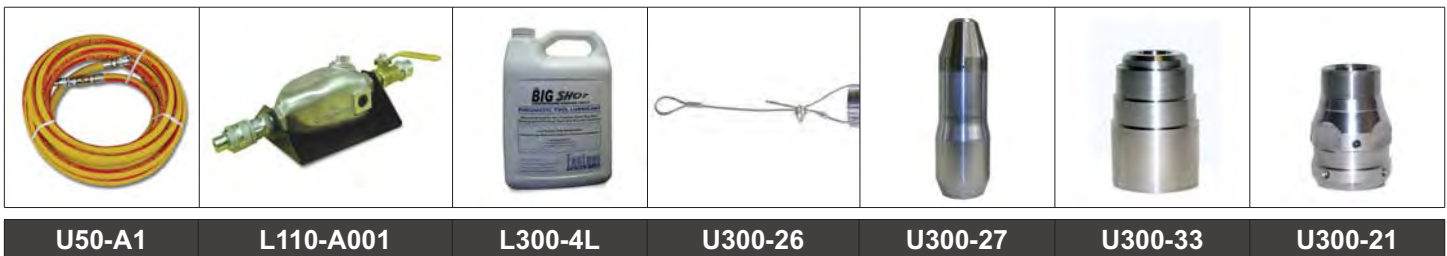

U50-A1

L110-A001

L300-4L

U300-26

U300-27

U300-33

U300-21

Industry Leading
3 YEAR
Comprehensive Warranty!

For sales and service, contact your local Footage Tools Distributor

all rights reserved 2007