
VSI

PIPELINE INSULATOR

ANSI 300



IMAC Systems, Inc.
90 Main Street, PO Box 1605
Tullytown, PA 19007

1-800-955-4GAS
Phone: (215) 946-2200
Fax: (215) 943-2984

sales@imacsystems.com

VSI


PIPELINE INSULATOR

ANSI 300

- State-of-the-Art Engineered for Applications in Natural Gas Systems
- Ends of Schedule 80 Steel Pipe per ASTM A53 Grade "B"
- High-Speed Spin Molded Urethane-to-Pipe Seal. Also, Mechanically Compressed by Fiberglass Winding.
- Unitized Body of Reinforced Filament Helix-Wound Fiberglass per Mil-R-60346C Laminated with Epoxy per Mil-R-9300B Electrical Grade
- American Made with Off-the-Shelf Deliveries
- Very economically priced
- High Dielectric Strength - 20,000 Volts DC - Air Gap Controlled
- Rugged High Strength Design - Resistant to Bending and Pullout
- Maintenance Free Performance - Permanently Factory Sealed
- Bubble Tight - 150% Shell Tested with Nitrogen

VSI

PIPELINE INSULATOR ANSI 300

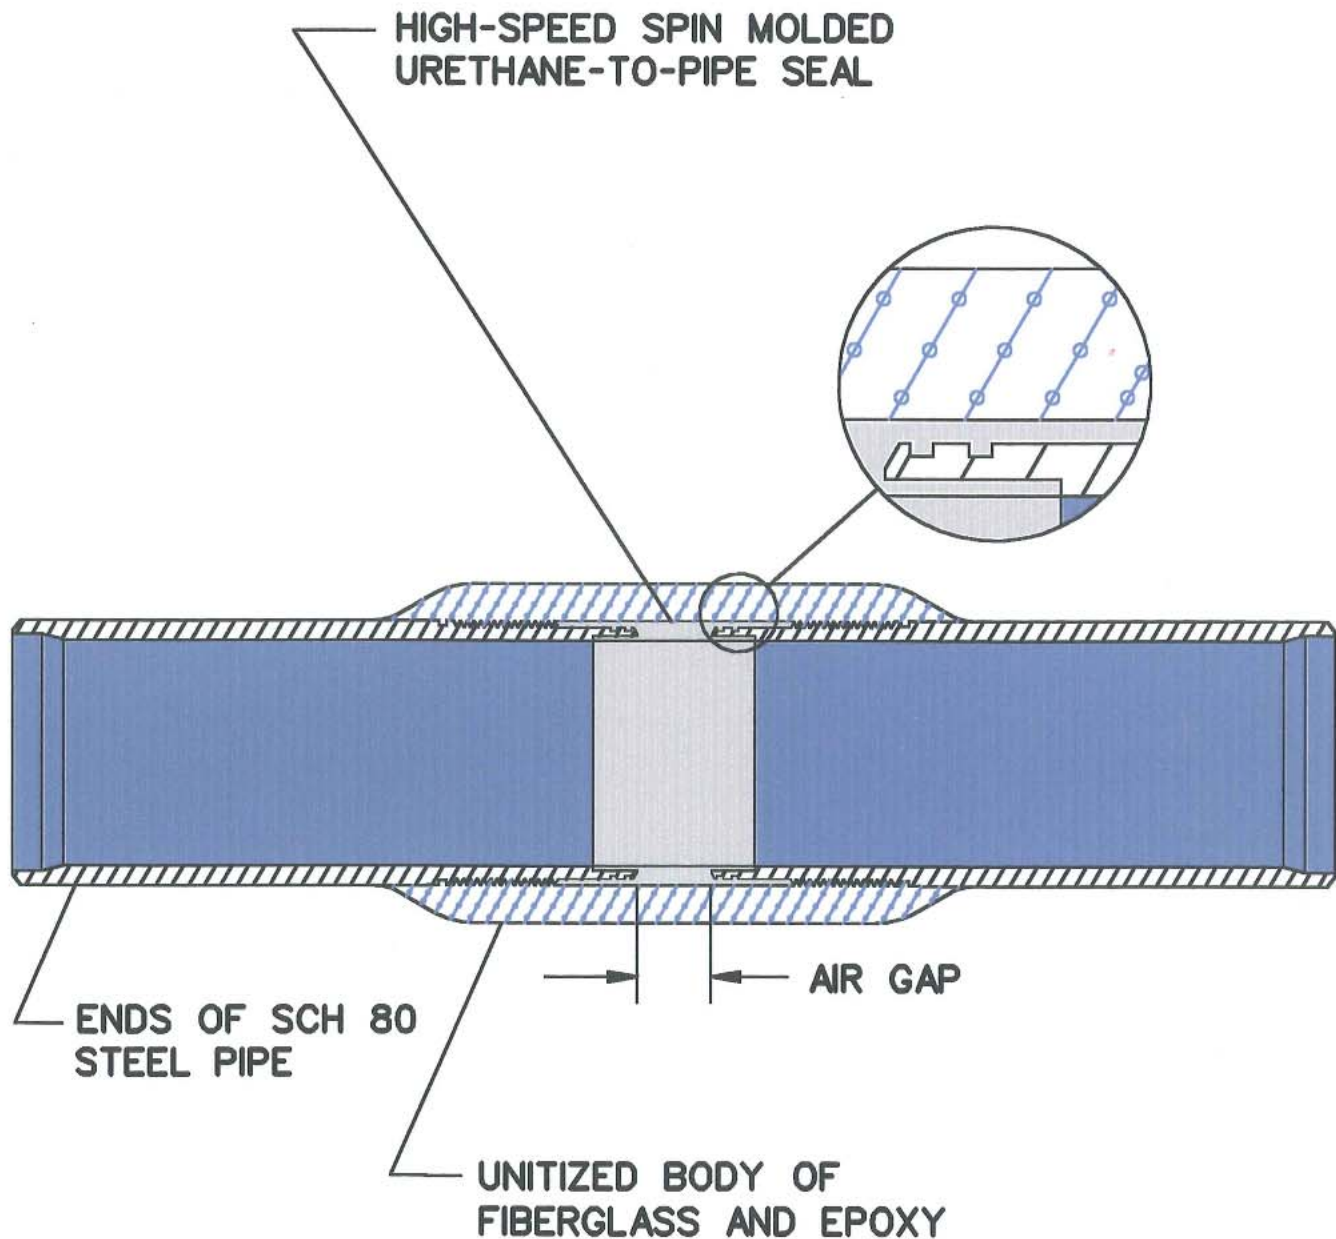

VSI

PIPELINE INSULATOR

ANSI 300

SIZE	"A"	"B"	"C"	"D"	"E"	"F"	"G"	"H"	WT(LBS)
2"	2.067	1.939	2	3 $\frac{1}{4}$	2 $\frac{3}{8}$	7 $\frac{3}{4}$	21 $\frac{5}{8}$	1	11
3"	3.068	2.900	3	4 $\frac{1}{2}$	3 $\frac{1}{2}$	8 $\frac{1}{2}$	21 $\frac{5}{8}$	1 $\frac{1}{8}$	21
4"	4.026	3.826	4	5 $\frac{3}{4}$	4 $\frac{1}{2}$	9 $\frac{3}{4}$	22 $\frac{1}{2}$	1 $\frac{1}{4}$	35
6"	6.065	5.761	6	8 $\frac{3}{8}$	6 $\frac{5}{8}$	11 $\frac{3}{8}$	22 $\frac{3}{4}$	1 $\frac{3}{8}$	68
8"	7.981	7.625	8	10 $\frac{7}{16}$	8 $\frac{5}{8}$	13 $\frac{1}{2}$	25	1 $\frac{1}{2}$	116
10"	10.020	9.564	10	13 $\frac{1}{2}$	10 $\frac{3}{4}$	16 $\frac{1}{2}$	27 $\frac{1}{2}$	1 $\frac{5}{8}$	187
12"	11.938	11.376	12	15 $\frac{1}{2}$	12 $\frac{3}{4}$	18 $\frac{1}{2}$	30 $\frac{1}{2}$	1 $\frac{3}{4}$	285

