

# FLOOD WATERS MAY RISE

*When submerged in water, the VLP® takes action and seals the open vent line. As the water recedes, gravity allows the vent line to re-open.*

Distributed by:  
Linc Energy Systems  
[www.LincEnergySystems.com](http://www.LincEnergySystems.com)



## VENT LINES STAY DRY


*Water and debris are kept out of crucial vent lines, saving natural gas pressure regulators from damage and corrosion.*

### VENT LINE PROTECTOR (VLP®)

Patent Pending

#### FEATURES

- Rugged Finish
- Stainless Steel Screen and Baffle Plates Prevent Vent Line Contamination
- Tested and Approved by the Gas Technology Institute (GTI)
- Lightweight Aluminum Housing
- Normally Open, Positive Close
- Integral Float Guide Zones for the Perfect Seal
- Replaceable Polymer Float with High Grade Silicone Dry Seal
- Engineered for Use in Zones Susceptible to Flooding
- Made in the USA

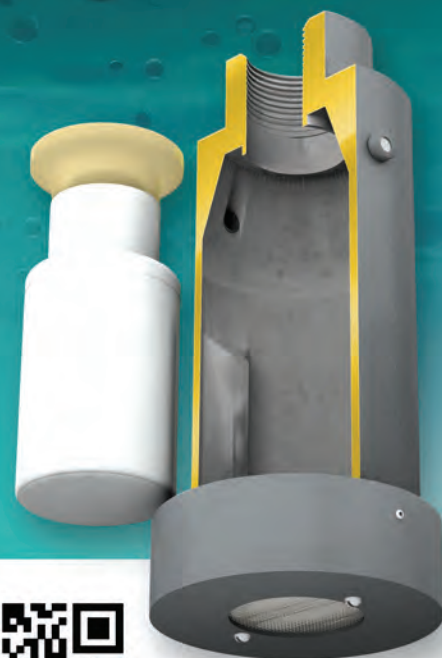

Systems, Inc.

International Measurement and Control Systems

90 Main Street, PO Box 1605  
Tullytown, PA 19007  
Phone: (215) 946-2200 • Fax: (215) 943-2984  
**1-800-955-4GAS**  
Email: [sales@imacsystems.com](mailto:sales@imacsystems.com)  
**[www.imacsystems.com](http://www.imacsystems.com)**



Scan the QR code to visit:  
[www.imacsystems.com/VLP/video](http://www.imacsystems.com/VLP/video)