

Now...A Unique, Universal, Tamper-Resistant Locking Device for Plug Valves

RELIABLE. TRUSTWORTHY. AMERICAN MADE.

LUBRICATED PLUG VALVE LOCKING DEVICE

FEATURES

- Valve lockout device
- Adapts to valves ½" through 6"
- Fits most existing plug valves without modification
- One size fits all
- Eliminates need to stock different sizes
- Unique swivel feature allows cap to be turned with no rotation of the plug
- Tamper-resistant—eliminates gas pilferage
- Will not rust or freeze up
- Installs with snap ring pliers
- Comply during service disconnects to prevent tampering (CFR 49, 186-199, 192.727)



**INTEGRATES WITH
GREASE FITTING**



 **Systems, Inc.**


International Measurement and Control Systems

90 Main Street, PO Box 1605 • Tullytown, PA 19007

Toll Free: 1-800-955-4GAS • Phone: (215) 946-2200 • Fax: (215) 943-2984

Email: sales@imacsystems.com • www.imacsystems.com • www.plugvalvelock.com

INSTALLATION INSTRUCTIONS

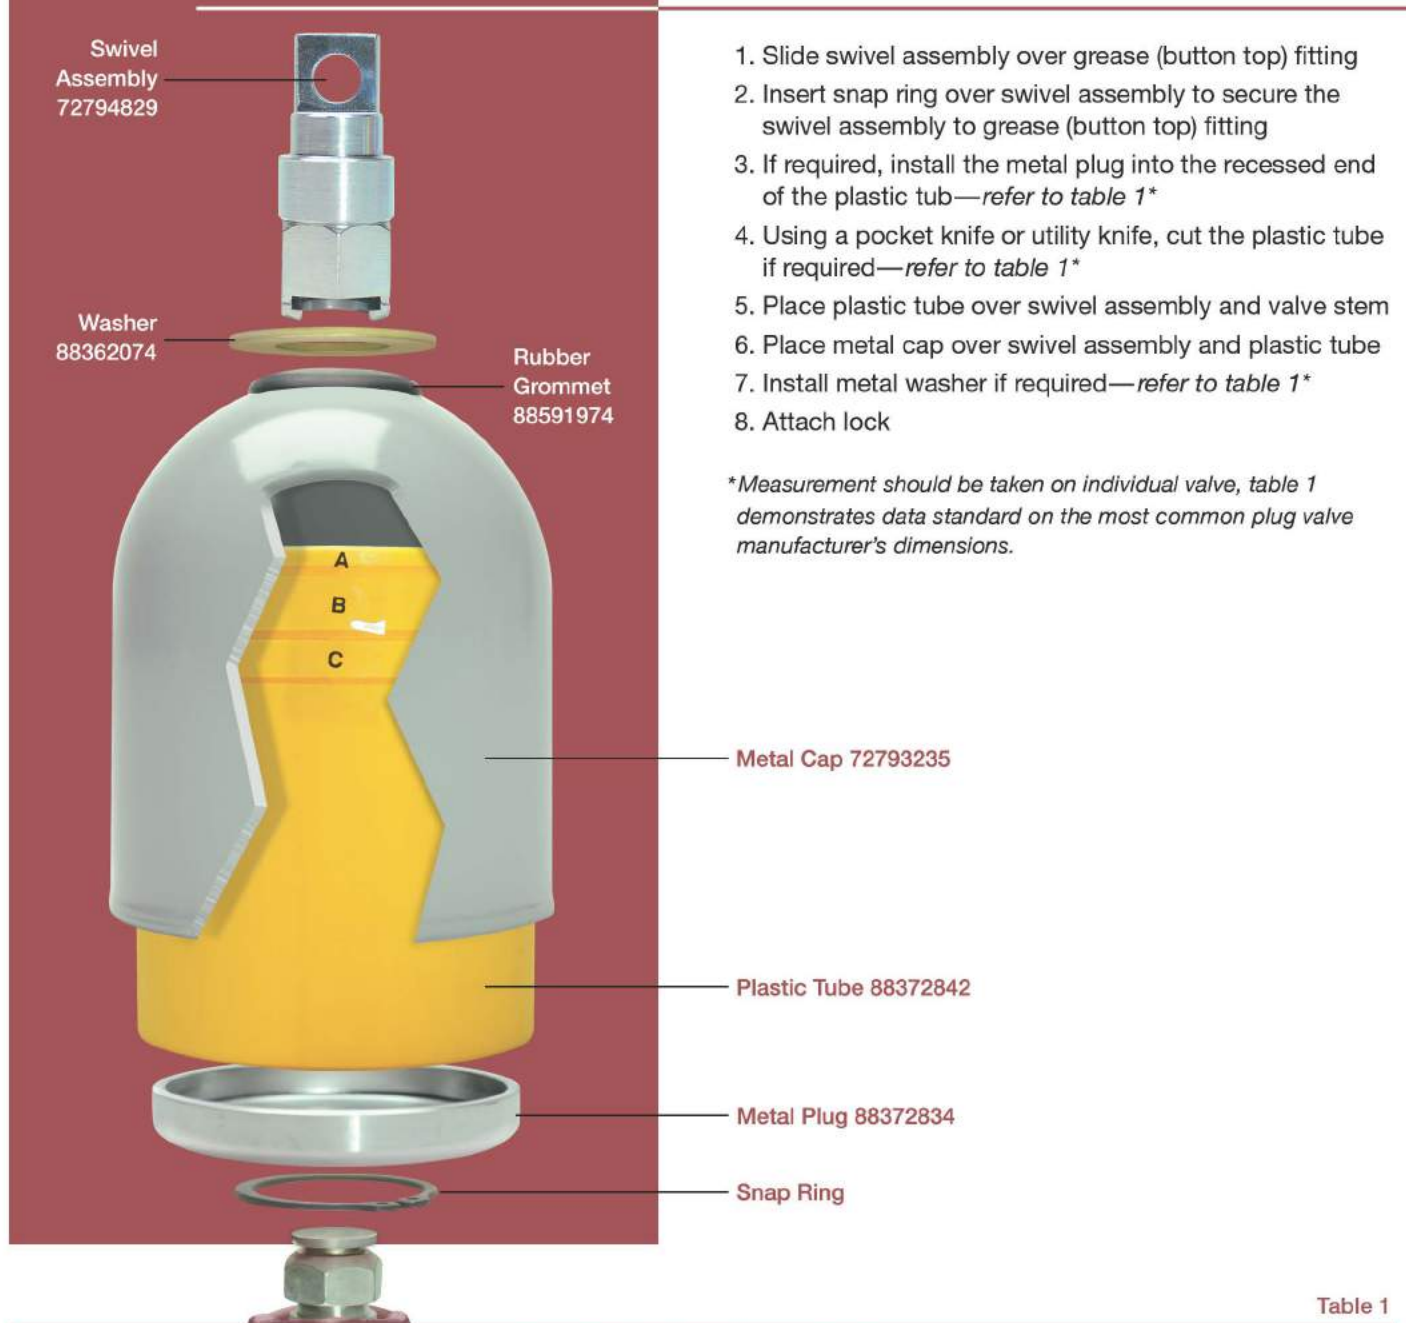

1. Slide swivel assembly over grease (button top) fitting
2. Insert snap ring over swivel assembly to secure the swivel assembly to grease (button top) fitting
3. If required, install the metal plug into the recessed end of the plastic tube—refer to table 1*
4. Using a pocket knife or utility knife, cut the plastic tube if required—refer to table 1*
5. Place plastic tube over swivel assembly and valve stem
6. Place metal cap over swivel assembly and plastic tube
7. Install metal washer if required—refer to table 1*
8. Attach lock

*Measurement should be taken on individual valve, table 1 demonstrates data standard on the most common plug valve manufacturer's dimensions.

Table 1

TYPICAL INSTALLATIONS				
VALVE SPECIFICATIONS		METAL PLUG P/N 88372834	PLASTIC TUBE P/N 88372842	METAL WASHER P/N 88362074
DESCRIPTION	SIZES			
CAST IRON SCREW END, FLANGE END, 200 WOG	Up to 1½"	Insert	Cut at C	Remove
	2"	Insert	Cut at B	Remove
	3" and 4"	Remove	Do Not Cut	Remove
CARBON STEEL WELD END, 200 WOG	2"	Insert	Cut at C	Remove
	3" and 4"	Remove	Cut at B	Install
	6"	Remove	Cut at A	Remove
CAST IRON FLANGE END, 200 WOG	6"	Remove	Cut at A	Remove